

Ventosas cristales




Capacidad
máxima
350 Kg

Capacidad máxima	350 Kg
Peso	35 Kg sin extensiones
Ventosas	4 uds. x Ø 3,00 m
Largo mínimo	0,70 m
Largo máximo	1,35 m
Altura mínima	0,74 m
Altura máxima	1,75 m
Tipo ventosa	Ventosa manual

NOTA: las dimensiones de algunas unidades de este modelo pueden variar.

Equipo



Plataformas
Eléctricas

Plataformas
Diésel

Manutención
Industrial

Manipuladores
de carga

Plataformas
especiales

Mini-Grúas
y vidrio

Suction Disc UPG 350-2




Easy glass lifting and handling with vacuum rigs

UPG 350-2

Order No.: 101130

- » **Lifting capacity up to 350 kg**
- » 2-circuit-system, 2-fold secured with integrated reserve tank
- » Extension arms allow the handling of even large-scale elements
- » Manual turning by 360°, engage with every 1/8 turn
- » Manual tilting by 90°
- » Suction discs with spring-loaded plunger / joint
- » Individual arrangement of the vacuum cups without tools
- » Integrated measuring devices for monitoring the vacuum and energy supply
- » Optical / acoustic warning devices
- » Off-grid Motor with 12 V, incl. 110/220 V charger

DIN EN 13155

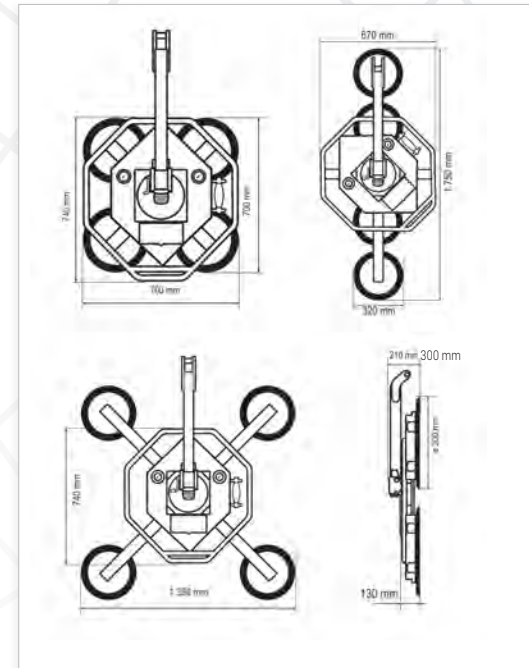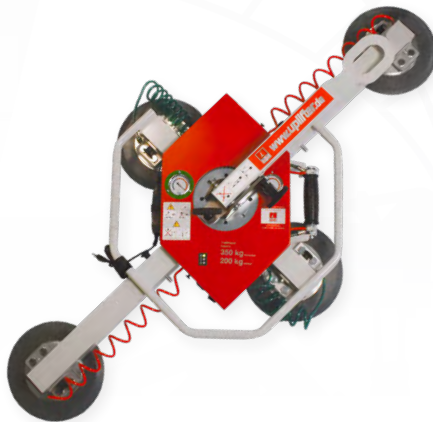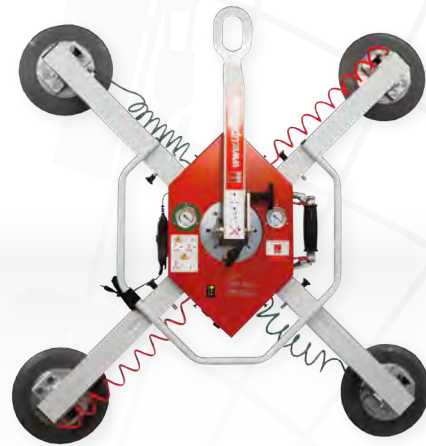

» Transport dolly for suction disc, please see **TRANSPORT DEVICES**.

TECHNICAL DATA	
Vacuum system	2-circuit-system
Lifting capacity	350 kg horizontal, 300 kg vertical
Vacuum plates	4 pcs., Ø 300 mm
Device weight	35 kg
Height of device	Min. 210 mm
Operating temp.	0 up to 40° C
Operating time	8 hours
Accessory	incl. wooden transportbox
Optional	Mount-Extensions, UPT 200 transport unit, shorted load arm

